
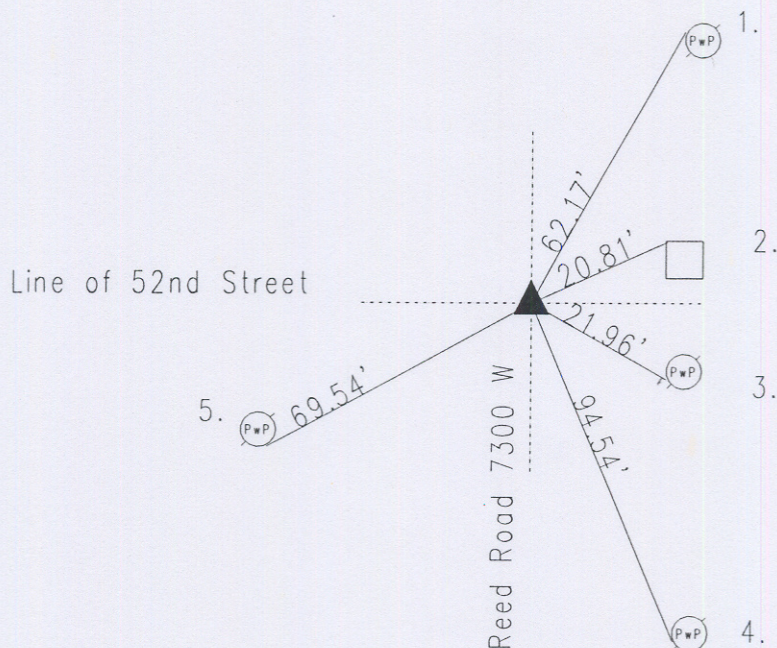


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 11 TOWNSHIP 16 RANGE 2  
DATE: 10-24-07  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison 3" down  
METHOD OF ESTABLISHMENT: County: 6-1-06  
IN. S.P.C. E ZONE NAD '83  
NAME: 16021104  
N: 510512.6090(m)  
E: 46667.8310(m)

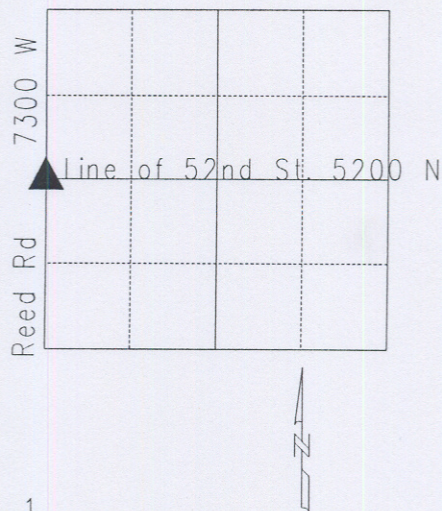

Original post seet 1820 by Laughlin with witness: 6" beech S 72 E 25 links; 10" beech S 32 W 10 links per Marion County Atlas pg. 3. E Q corner 10-16-2 called stone 3-18-69. 1-24-75 called square head bolt. Excavated 10-29-86 stone found 18" down. Harrison set. Re-tied 6-13-95 by Whiteside. Re-tied 6-3-01 by Wilcoxon. Re-tied 10-24-07 by Wilcoxon. Re-set because of re-surfacing. 16021104

REF.	DISTANCE	DESCRIPTION
1.	62.17'	Mag nail w/brass washer W PwP#1-322 B 10"up
2.	20.81'	NW corner of metal telephone box 6" up
3.	21.96'	Mag nail w/brass washer SW PwP#352-352A 12"up
4.	94.54'	Mag nail w/brass washer W PwP#12-352 A 12"up
5.	69.54'	PK nail S PwP#47-3512 A